

SERIES 55, AWWA C515

LARGE DIAMETER DUCTILE

Series 55 AWWA Availability Listing

Size	FLxFL	MJxFL	MJxMJ
18"	X	X *	X
20"	X	X *	X
24"	X	X *	X
30"	X **	X **	X **
36"	X	N/A	X

* MJxFL Adaptor Kit on FLxFL valve and MJxFL can be used as tapping valve


** Integral Bypass Flanges on long lay length

AWWA C515, LARGE DIAMETER DUCTILE, RESILIENT WEDGE GATE VALVES

Type

**Series 55/FFN
LARGE DIAMETER C515
FLxFL**

Full wall ductile iron
Flanged ends to
ANSI B 16.1,
Class 150 NRS
250 PSI
Size 18", 20", 24", 30", 36"

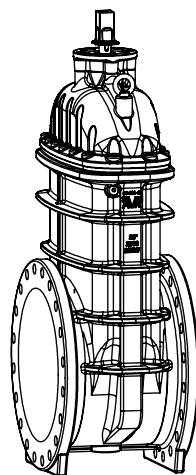


AVK Ref. #	Size	Weight		Price US \$
		kg	lb	
55-450-FFN	18"	599	1321	25,745
55-500-FFN	20"	639	1408	30,919
55-600-FFN	24"	856	1886	43,963
55-800-FFN	30"	2434	5366	76,700
55-900-FFN	36"	3780	8332	122,700

30" FLxFL available in lay lengths of 26" - Short, and 39" - Long. Long lay length has integral bypass flanges for mounting bypass valve assembly. Specify lay length when ordering.
30", 36" Integral bypass flanges
All 30" and 36" valves are supplied with actuation.

**Series 55/MFN
LARGE DIAMETER C515
MJ X FL**

Full wall ductile iron
Mechanical joint end
X Flanged end to ANSI B 16.1
Class 150 NRS
250 PSI
Size 18", 20", 24", 30"




AVK Ref. #	Size	Weight		Price US \$
		kg	lb	
55-450-MFN	18"	XXXX	XXXX	25,745
55-500-MFN	20"	XXXX	XXXX	30,919
55-600-MFN	24"	XXXX	XXXX	43,963
55-800-MFN	30"	XXXX	XXXX	76,700

18", 20", 24", FLxFL valve with MJxFL adaptor, less MJ accessories
30", Integral bypass flanges
All 30" and 36" valves are supplied with actuation.

**Series 55/MMN
LARGE DIAMETER C515
MJxMJ**

Full wall ductile iron
Mechanical joint ends
NRS
250 PSI
Size 18", 20", 24", 30", 36"

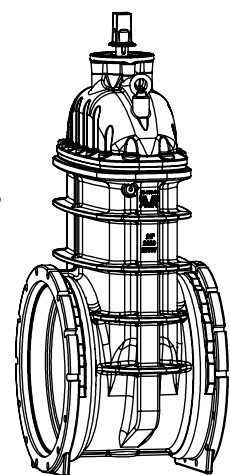


AVK Ref. #	Size	Weight		Price US \$
		kg	lb	
55-450-MMN	18"	603	1330	25,745
55-500-MMN	20"	635	1400	30,919
55-600-MMN	24"	847	1867	43,963
55-800-MMN	30"	2472	5450	76,700
55-900-MMN	36"	3843	8472	122,700

30", 36" Integral bypass flanges
All 30" and 36" valves are supplied with actuation.

Type

**Series 55/FFO
LARGE DIAMETER C515
FLxFL OS&Y**

Full wall ductile iron
Flanged ends to
ANSI B 16.1,
Class 150 NRS
250 PSI
Size 18", 20", 24"

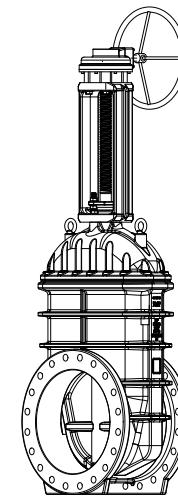

AVK Ref. #	Size	Weight		Price US \$
		kg	lb	
55-450-FFO	18"	599	1321	34,690
55-500-FFO	20"	639	1408	42,050
55-600-FFO	24"	856	1886	56,560

Series 55 OS&Y valves reflect pricing for bevel gearing standard. Manually operated OS&Y's coming soon.